



* All images are for illustrative purposes only.

UHD Signage 65/55/49/43" UH5F-H

LG UHD Signage



Clear View
with Non-glare Coating



Superb Picture Quality



Sleek and Practical Design



Product Reliability




webOS Smart Platform




Meeting Room Solution

SUPERB PICTURE QUALITY

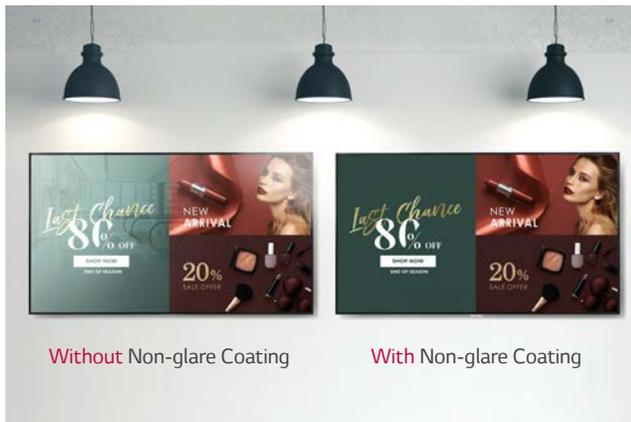

Clear View with Non-glare Coating


Viewers can be distracted by unnecessary reflections when watching a screen under brightly lit conditions. The UH5F-H series has resolved such inconveniences by increasing the level of haze, which enhances visibility and text readability.

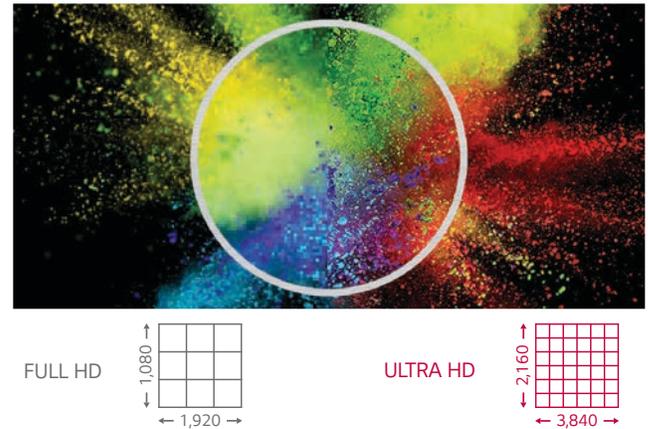

ULTRA HD Resolution

With resolution that is 4 times higher than Full HD, Ultra HD makes the color and details of the contents more vivid and realistic. In addition, the wide viewing angle enabled by LG IPS Panel, provides clear contents with no distortion.

SLEEK AND PRACTICAL DESIGN

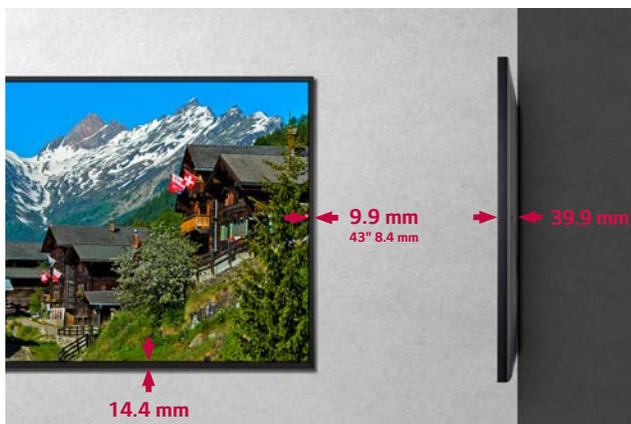

Narrow Bezel & Slim Depth

This series has a smaller bezel size and thickness, which saves space and enables easy installation. In addition, it increases the immersive experience from the screen and provides a sophisticated design, improving the décor of the space where the product is installed.



Detachable Logo and Built-in Speaker

This series is equipped with a new transparent logo which is well organized with surroundings. Also, it is removable so users have flexibility during installation. Contents will be enriched with sound effects from built-in speakers, without the need for purchasing or installing external speakers.

PRODUCT RELIABILITY



IP5x Certified Design

The IP5x Dust-Proof Certification ensures that the product is completely protected from dust, eliminating the risk of performance degradation.




30° Tilting Installation

When a display is installed at high places, it is usually tilted for the user's comfort viewing. In consideration of this, the UH5F series supports the installation with 30 degrees of tilt*.


* Tilt installation of up to 30 degrees facedown is supported.
(In conditions within 30°C temperature, 50% humidity)

EASY INSTALLATION

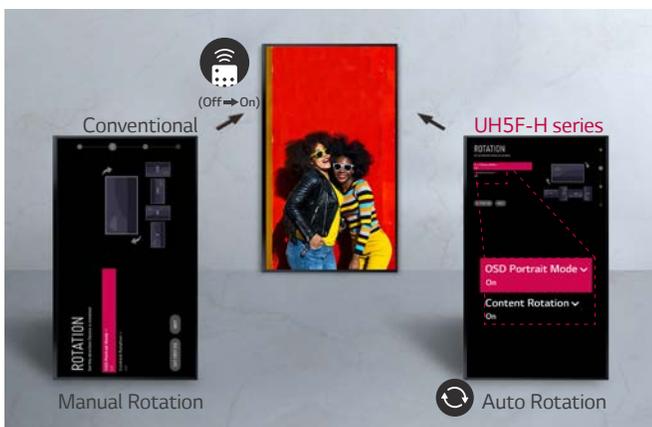

Auto Screen Rotation


This series automatically detects its orientation (landscape or portrait mode) in the initial installation step, so manual rotation set-up process isn't required. The direction of display and background contents will be already set when you turn on a display at first.

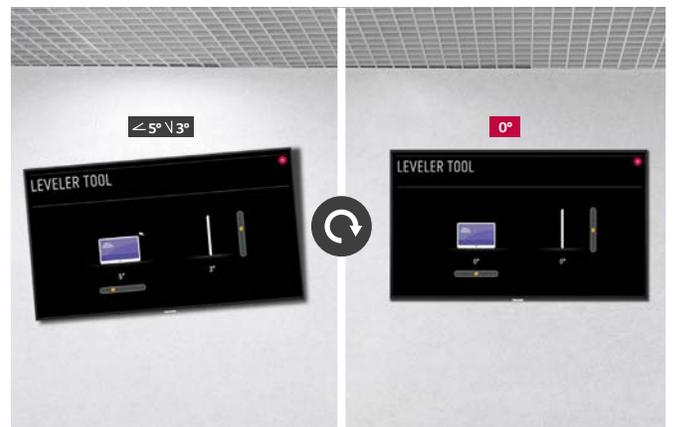

Fine Adjustment

This UH5F-H series is equipped with a "horizontal sensor" which shows users how the device is tilt, so that it can be precisely installed.

webOS SMART SIGNAGE PLATFORM

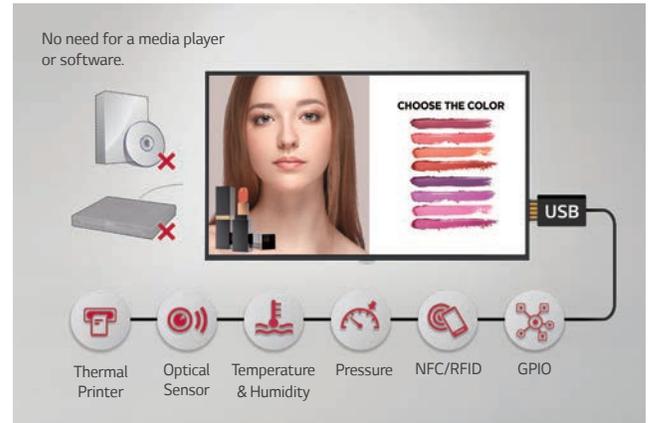

High-Performance with webOS

The UH5F-H series has a built-in Quad Core System-on-Chip (SoC) that can execute several tasks at once while providing smooth content playback without the need for a media player. Utilizing the SoC, LG's webOS smart signage platform has a convenient graphical user interface and simple app development tools.

Various Sensor Applications

LG webOS smart signage platform easily supports connections with external sensors such as GPIO, NFC/RFID, temperature sensors, etc. via USB plug-in. That means there is no cost to purchase or maintain additional software or media players for creating value-added solutions.

MEETING ROOM SOLUTION COMPATIBILITY



Compatible with AV Control Systems

The UH5F-H series has been certified Crestron Connected® for high compatibility with professional AV controls to achieve seamless integration and network-based control, boosting business management efficiency.

Compatible with Video Conference System

The UH5F is compatible with Cisco conferencing systems that offer powerful HDMI-based control for a smarter video conference experience that avoids wasted time setting up the picture or input settings.



SPECIFICATIONS

	65UH5F-H	55UH5F-H	49UH5F-H	43UH5F-H		
PANEL	Screen Size	65"	55"	49"	43"	
	Panel Technology	IPS	IPS	IPS	IPS	
	Back Light Type	Edge	Edge	Edge	Edge	
	Aspect Ratio	16:9	16:9	16:9	16:9	
	Native Resolution	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)	3840 x 2160 (UHD)	
	Refresh Rate	60 Hz	60 Hz	60 Hz	60 Hz	
	Brightness (Typ)	500 nits	500 nits	500 nits	500 nits	
	Contrast Ratio	1,100:1	1,100:1	1,000:1	1,100:1	
	Dynamic CR	1,000,000:1	1,000,000:1	1,000,000:1	1,000,000:1	
	Color gamut	BT709 95%	BT709 95%	BT709 95%	BT709 95%	
	Viewing Angle(H x V)	178° X 178°	178° X 178°	178° X 178°	178° X 178°	
	Color Depth	10 bit, 1.07 Billion colors	10 bit, 1.07 Billion colors	10 bit, 1.07 Billion colors	10 bit, 1.07 Billion colors	
	Response Time (G to G)	8 ms	8 ms	8 ms	8 ms	
	Surface Treatment (Haze)	28%	28%	28%	28%	
	Lifetime	50,000 Hrs	50,000 Hrs	50,000 Hrs	50,000 Hrs	
Operation Hours (Hours/Day)	24/7	24/7	24/7	24/7		
Portrait / Landscape	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes		
SOUND	Yes	Yes	Yes	Yes		
CONNECTIVITY	HDMI IN	Yes (3) HDMI1/HDMI2: HDCP 2.2/1.4 HDMI3: HDCP 1.4	Yes (3) HDMI1/HDMI2: HDCP 2.2/1.4 HDMI3: HDCP 1.4	Yes (1), HDCP2.2/1.3	Yes (1), HDCP2.2/1.3	
	DP IN	Yes (1), HDCP1.4	Yes (1), HDCP1.4	Yes (1), HDCP1.4	Yes (1), HDCP1.4	
	DVI-D IN	Yes (1), HDCP1.4	Yes (1), HDCP1.4	Yes (1), HDCP1.4	Yes (1), HDCP1.4	
	Audio In	Yes	Yes	Yes	Yes	
	RS232C IN	Yes (1), 4pin 3.5mm Jack	Yes (1), 4pin 3.5mm Jack	Yes (1), 4pin 3.5mm Jack	Yes (1), 4pin 3.5mm Jack	
	RJ45 (LAN) IN	Yes	Yes	Yes	Yes	
	IR IN	Yes	Yes	Yes	Yes	
	USB IN	USB2.0 Type A(1)	USB2.0 Type A(1)	USB2.0 Type A(1)	USB2.0 Type A(1)	
	DP Out	Yes (1), Input: HDMI1/2/3/DVI/DP	Yes (1), Input: HDMI1/2/3/DVI/DP	Yes (1), Input: HDMI1/2/3/DVI/DP	Yes (1), Input: HDMI1/2/3/DVI/DP	
	Audio Out	Yes	Yes	Yes	Yes	
RS232C OUT	Yes (1), 4pin 3.5mm Jack	Yes (1), 4pin 3.5mm Jack	Yes (1), 4pin 3.5mm Jack	Yes (1), 4pin 3.5mm Jack		
MECHANICAL	Bezel Color	Black	Black	Black	Black	
	Bezel Width	T/R/L: 9.9mm, B: 14.4mm	T/R/L: 9.9mm, B: 14.4mm	T/R/L: 9.9mm, B: 14.4mm	T/R/L: 8.4mm, B: 14.4mm	
	Weight(Head)	62.3 lbs / 28.2 kg	41.9 lbs / 19.0 kg	34.0 lbs / 15.4 kg	24.7 lbs / 11.2 kg	
	Packed Weight	77.2 lbs / 35.0 kg	53.4 lbs / 24.2 kg	41.4 lbs / 18.8 kg	30.2 lbs / 13.7 kg	
	Monitor Dimension (W x H x D)	57.2 x 33.2 x 1.6 in 1453.3 x 844.0 x 39.9 mm	48.6 x 28.4 x 1.6 in 1234.4 x 720.9 x 39.9 mm	43.3 x 25.4 x 1.6 in 1098.6 x 644.5 x 39.9 mm	37.9 x 22.4 x 1.6 in 962.5 x 568.0 x 39.9 mm	
	Carton Dimensions (W x H x D) (Box outer size)	63.0 x 43.1 x 6.9 in 1600.0 x 1095.0 x 175.0 mm	53.5 x 32.9 x 6.9 in 1360.0 x 835.0 x 175.0 mm	47.1 x 30.5 x 6.4 in 1197.0 x 775.0 x 162.0 mm	41.7 x 26.0 x 6.0 in 1060.0 x 660.0 x 152.0 mm	
	Handle	Yes	Yes	Yes	Yes	
	VESA™ Standard Mount Interface	300 x 300	300 x 300	300 x 300	200 x 200	
	Tilt (Face Down)	Yes (Max 30°, 30°C temp, 50% humidity)	Yes (Max 30°, 30°C temp, 50% humidity)	Yes (Max 30°, 30°C temp, 50% humidity)	Yes (Max 30°, 30°C temp, 50% humidity)	
	Operation Temperature	32°F to 104°F / 0°C to 40°C	32°F to 104°F / 0°C to 40°C	32°F to 104°F / 0°C to 40°C	32°F to 104°F / 0°C to 40°C	
	Operation Humidity	10 % to 80 %	10 % to 80 %	10 % to 80 %	10 % to 80 %	
	OPS type compatible	Yes	Yes	Yes	Yes	
	OPS Power built in	No	No	No	No	
	KEY FEATURES	Internal Memory	8 GB	8 GB	8 GB	8 GB
		Built-in Wi-Fi	Yes	Yes	Yes	Yes
Temperature Sensor		Yes	Yes	Yes	Yes	
Auto Brightness sensor		Yes	Yes	Yes	Yes	
Local Key Operation		Yes	Yes	Yes	Yes	
webOS ver.		webOS4.1	webOS4.1	webOS4.1	webOS4.1	
Local Contents Scheduling		Yes	Yes	Yes	Yes	
Group Manager		Yes	Yes	Yes	Yes	
USB Plug & Play		Yes	Yes	Yes	Yes	
Fail over		Yes	Yes	Yes	Yes	
Booting Logo Image		Yes	Yes	Yes	Yes	
No Signal Image		Yes	Yes	Yes	Yes	
RS-232C Sync		Yes	Yes	Yes	Yes	
Local Network Sync		Yes	Yes	Yes	Yes	
PIP		Yes	Yes	Yes	Yes	
PBP		Yes (4)	Yes (4)	Yes (4)	Yes (4)	
Screen Share		Yes	Yes	Yes	Yes	
Video Tag		Yes (4)	Yes (4)	Yes (4)	Yes (4)	
Play via URL		Yes	Yes	Yes	Yes	
Screen Rotation		Yes	Yes	Yes	Yes	
External Input Rotation		Yes	Yes	Yes	Yes	
Gapless Playback		Yes	Yes	Yes	Yes	
Tile Mode Setting		Yes (Max. 15x15)	Yes (Max. 15x15)	Yes (Max. 15x15)	Yes (Max. 15x15)	
Setting Data Cloning		Yes	Yes	Yes	Yes	
SNMP		Yes	Yes	Yes	Yes	
ISM Method		Yes	Yes	Yes	Yes	
Auto Set ID		Yes	Yes	Yes	Yes	
Status Mailing		Yes	Yes	Yes	Yes	
Control Manager		Yes	Yes	Yes	Yes	
Crestron Inside		Yes	Yes	Yes	Yes	
Smart Energy Saving		Yes	Yes	Yes	Yes	
PM mode		Yes	Yes	Yes	Yes	
Wake on LAN		Yes	Yes	Yes	Yes	
Beacon		Yes	Yes	Yes	Yes	
HDMI-CEC		Yes	Yes	Yes	Yes	
SI Server Setting	Yes	Yes	Yes	Yes		
webRTC	Yes	Yes	Yes	Yes		
Prodiom	Yes	Yes	Yes	Yes		
POWER	Power Supply	100-240 Vac, 50/60 Hz	100-240 Vac, 50/60 Hz	100-240 Vac, 50/60 Hz	100-240 Vac, 50/60 Hz	
	Power Type	Built-In Power	Built-In Power	Built-In Power	Built-In Power	
	Typ. Power	120W	105W	95W	75W	
	Max. Power	165W	145W	130W	110W	
	BTU (British Thermal Unit)	409 BTU/Hr (Typ.) / 563 BTU/Hr (Max)	358 BTU/Hr (Typ.) / 495 BTU/Hr (Max)	324 BTU/Hr (Typ.) / 444 BTU/Hr (Max)	256 BTU/Hr (Typ.) / 375 BTU/Hr (Max)	
	Smart Energy Saving	96 W	84 W	76 W	60 W	
	DPM	0.5 W	0.5 W	0.5 W	0.5 W	
Power off	0.5 W	0.5 W	0.5 W	0.5 W		
LG SOFTWARE & SERVICES*	SuperSign CMS	Yes	Yes	Yes	Yes	
	SuperSign Control / Control+	Yes / Yes	Yes / Yes	Yes / Yes	Yes / Yes	
	SuperSign WB	Yes	Yes	Yes	Yes	
	SuperSign Media Editor	Yes	Yes	Yes	Yes	
	Signage365 Care	Yes	Yes	Yes	Yes	
WARRANTY & OTHER	Warranty	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	
	FCC (Regulatory)	Class A	Class A	Class A	Class A	
	CE (Regulatory)	Yes	Yes	Yes	Yes	
	ErP	Yes	Yes	Yes	Yes	
	Energy Star	Yes	Yes	Yes	Yes	
	Basic Accessories	Remote Control (battery 2ea), Power Cord, QSG, IR/Light receiver, DP Cable (1.8m), Regulation Book, Phone to RS232C Adapter				



* SuperSign CMS, Control+, White Balance and Signage365 Care are optional pay-for software/services.

DIMENSIONS

65"

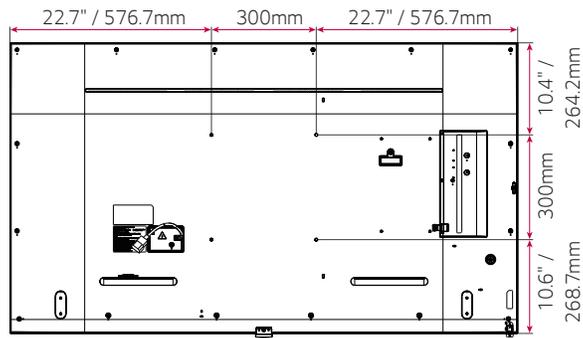
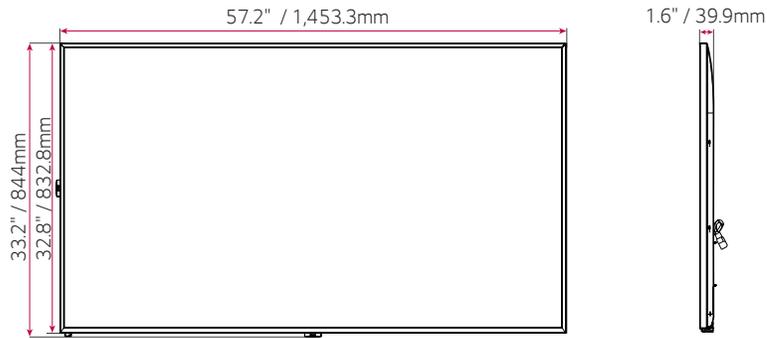


55"

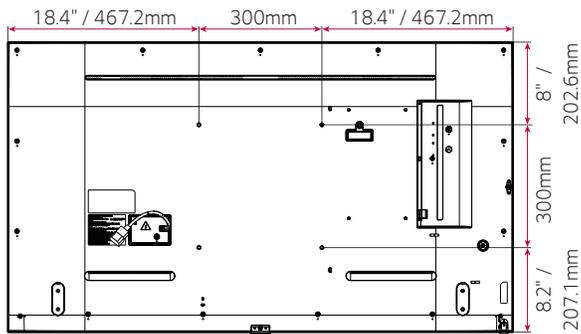
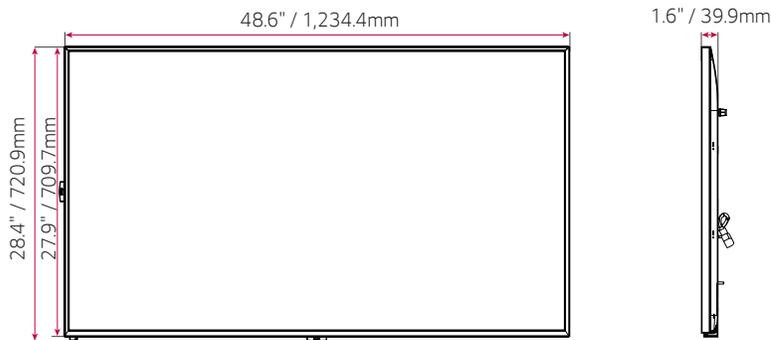


DIMENSIONS


49"

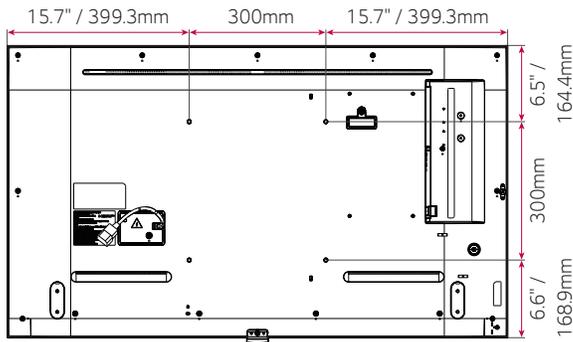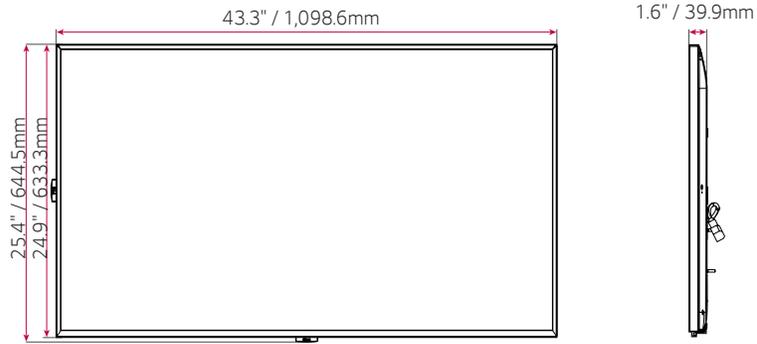

43"

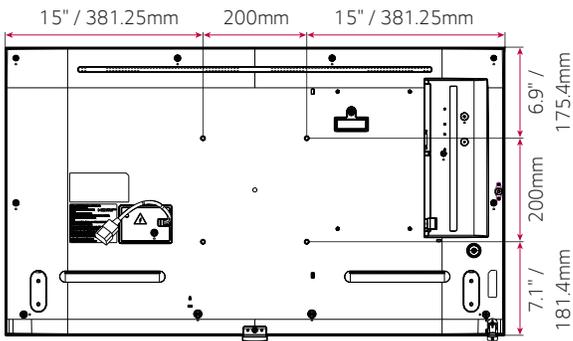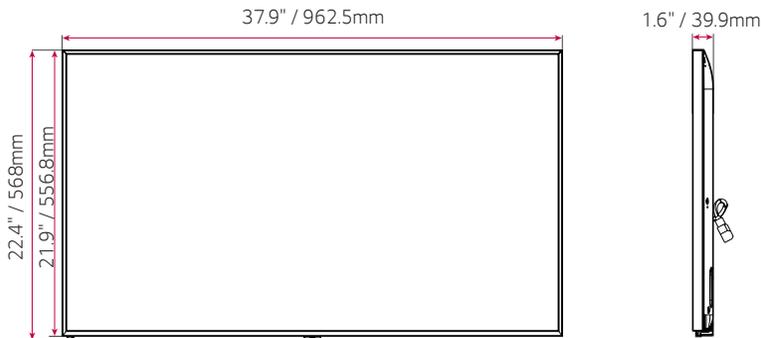

CONNECTIVITY

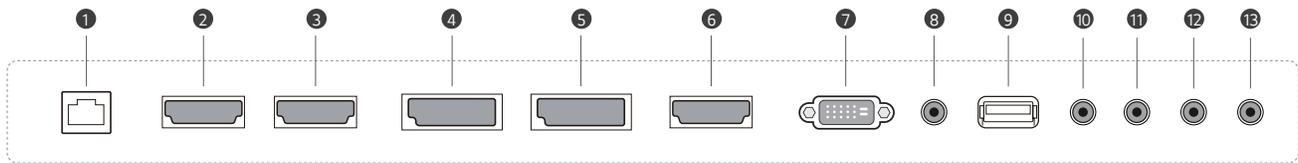

- ① LAN
- ② HDMI IN1
- ③ HDMI IN2
- ④ DP IN
- ⑤ DP OUT
- ⑥ HDMI IN3
- ⑦ DVI-D IN
- ⑧ IR & LIGHT SENSOR
- ⑨ USB IN
- ⑩ AUDIO IN
- ⑪ AUDIO OUT
- ⑫ RS-232C IN
- ⑬ RS-232C OUT

* Dimensions & Jack Panels may differ from the above image, so please contact LG sales team to verify before ordering.

