




Commercial Full HD TV Signage

LT340C Series

LG Commercial Lite TVs are specially designed for hospitality and business. Your guests and customers will welcome the LT340C's user-friendly interfaces and superb image and video quality.

LT340C SERIES

VALUE-ADDED SOFTWARE SOLUTION

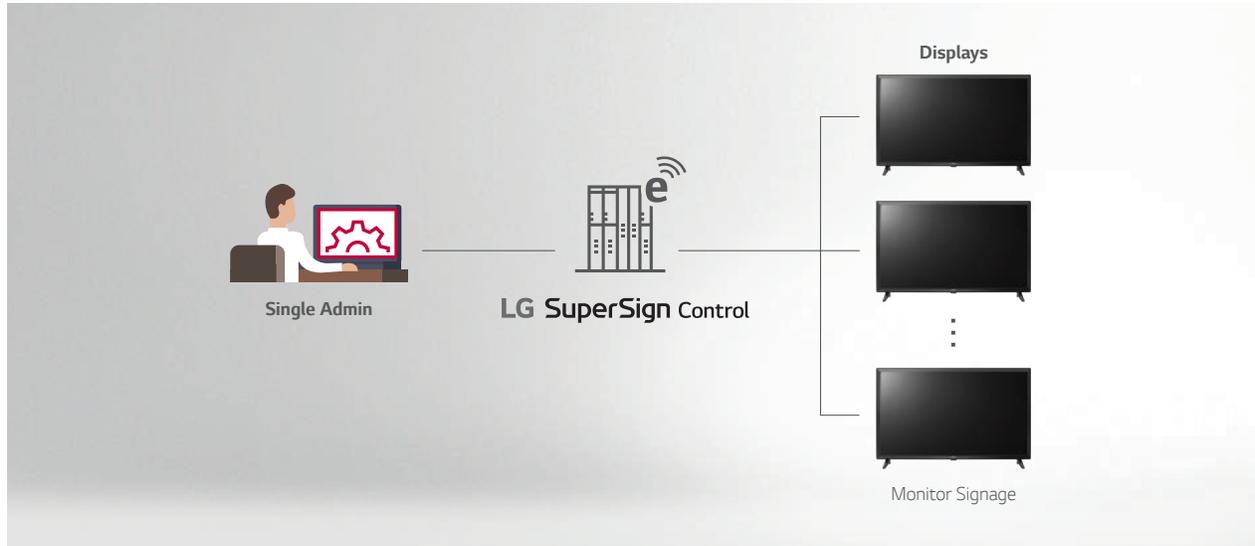

SuperSign Control

SuperSign Control is a basic control software that enables oversight of up to 100 displays from one account and single server. Essential factors such as power, volume and scheduling can be adjusted remotely with supported firmware updates.

SIMPLE CONTENT MANAGEMENT



USB Data Cloning

USB data cloning enables more efficient management of multiple displays for optimal operation and viewing. For content management updates, users simply copy data to a USB in one display and then easily distribute it to other displays through a USB plug-in.

Commercial Full HD TV Signage LT340C SERIES

POWERFUL MANAGEMENT



Real-Time Remote Monitoring

In case of malfunctions or errors, real-time remote care can be configured. If an error occurs, immediate notification is sent through the SNMP (Simple Network Management Protocol) to facilitate oversight and troubleshooting.

Power and Network in One Line

Our WOL (Wake-on LAN) enables users to send a message throughout the network to power on displays. This feature greatly simplifies the installation and maintenance processes as only a single wire is required for power and network connection.

Commercial Full HD TV Signage

LT340C SERIES

ADVANCED USABILITY



Compatibility with AV Control Systems

This LG TV features Crestron Connected® certification, a dedicated meeting room function designed to facilitate the increasing technical demands of the corporate meeting space market.

NOTE: Crestron Connected® is a network-based control system. Available AV control systems may differ by region.



DPM (Display Power Management)

From now on, you can configure the DPM (Display Power Management) function by simply turning it on. When there is no signal, the TVs enter DPM mode to manage power efficiently.

Commercial Full HD TV Signage

LT340C SERIES

VALUE-ADDED FEATURES



Custom Time Scheduler

Reduce operating time and energy use of your commercial TV by using our custom time scheduler. By inputting your opening and closing hours and holidays, this LT340C feature will turn the TV on and off according to your preferred schedule.



External Speaker Out

Enhance the entertainment experience by adding an additional speaker. Guests listen to and control the TV audio from anywhere in the business areas, including restrooms.

SPECIFICATIONS


		49LT340C0UB	43LT340C0UB	32LT340CBUB	
DISPLAY	Inch	49"	43"	32"	
	Resolution	1,920 x 1,080 (FHD)	1,920 x 1,080 (FHD)	1,366 x 768 (HD)	
	Backlight Unit Type	Direct BLU	Direct BLU	Direct BLU	
	Brightness	400 nits	400 nits	240 nits	
	TruMotion / Refresh Rate	60 Hz	60 Hz	60 Hz	
	Life Span	30,000 hrs	30,000 hrs	30,000 hrs	
	HDR_HLG	Yes	Yes	Yes	
AUDIO	Speakers	10W + 10W	10W + 10W	5W + 5W	
	Speaker System	2.0 ch	2.0 ch	2.0 ch	
FEATURES	Broadcasting System	Digital TV Reception (Terrestrial, Cable, Satellite)	ATSC (QAM / VSB), Analog NTSC	ATSC (QAM / VSB), Analog NTSC	
	Ease of Installation	EzManager (Simplicity)	Yes	Yes	
		USB Cloning	Yes	Yes	
	Management	Wake on LAN	Yes	Yes	Yes
		SNMP	Yes	Yes	Yes
		Diagnostics	Yes (USB)	Yes (USB)	Yes (USB)
		SI Compatible (TVLink Interactive)	Yes (RS232C, HDMI)	Yes (RS232C, HDMI)	Yes (RS232C, HDMI)
		HTNG-CEC	Yes (1.4)	Yes (1.4)	Yes (1.4)
		Simplink (HDMI-CEC)	Yes (1.4)	Yes (1.4)	Yes (1.4)
		Multi-IR Code	Yes	Yes	Yes
	Hospitality	Hotel Mode / PDM / Installer Menu	Yes (PDM)	Yes (PDM)	Yes (PDM)
		Lock Mode	Yes	Yes	Yes
		Welcome Video	Yes	Yes	Yes
		Welcome Screen (Splash Image)	Yes	Yes	Yes
		Insert Image	Yes	Yes	Yes
		External Speaker Out	Yes (Int / Fixed, 3.5 mm, Stereo, Single-Ended Type (GND, L+, R+), 1W with 8Ω)	Yes (Int / Fixed, 3.5 mm, Stereo, Single-Ended Type (GND, L+, R+), 1W with 8Ω)	Yes (Int / Fixed, 3.5 mm, Stereo, Single-Ended Type (GND, L+, R+), 1W with 8Ω)
		RJP (Remote Jack Pack) Compatibility	Yes LG / Teleadapt (RS232C), Teleadapt / Guestlink (HDMI CEC)	Yes LG / Teleadapt (RS232C), Teleadapt / Guestlink (HDMI CEC)	Yes LG / Teleadapt (RS232C), Teleadapt / Guestlink (HDMI CEC)
	USB	USB Auto Playback / USB Auto Playback + Playlist	Yes / Yes	Yes / Yes	Yes / Yes
	Setting Option	Auto Off / Sleep Timer	Yes / Yes	Yes / Yes	Yes / Yes
		Smart Energy Saving	Yes	Yes	Yes
		Motion Eye Care	Yes	Yes	Yes
	Signage (Corporate / Retail)	Crestron Compatibility	Yes	Yes	Yes
		DPM (Digital Power Management)	Yes	Yes	Yes
		Time Scheduler	Yes	Yes	Yes
		NTP Sync Timer	Yes	Yes	Yes
	SuperSign SW Compatibility	Control / Control Plus	Yes (Control)	Yes (Control)	Yes (Control)
	JACK INTERFACE	HDMI In	2 (1.4)	2 (1.4)	2 (1.4)
USB		1 (2.0)	1 (2.0)	1 (2.0)	
RF In		1 (Tuner)	1 (Tuner)	1 (Tuner)	
AV In		1 (Share with Component)	1 (Share with Component)	1 (Share with Component)	
Component In (Y, Pb, Pr-Video)		1 (RCA5 Type)	1 (RCA5 Type)	1 (RCA5 Type)	
Digital Audio Out (Coaxial / Optical)		1 (Optical)	1 (Optical)	1 (Optical)	
RGB In (D-Sub 15 pin) - PC		1	1	1	
PC Audio Input		1 (Share with Component Audio)	1 (Share with Component Audio)	1 (Share with Component Audio)	
RS-232C (D-Sub 9 pin)		1	1	1	
RJ45 (Usage Purpose)		1	1	1	
External Speaker Out (3.5 mm Phone Jack)		1 (Spk-Out Fixed 0.01 W-1.0 W)	1 (Spk-Out Fixed 0.01 W-1.0 W)	1 (Spk-Out Fixed 0.01 W-1.0 W)	

SPECIFICATIONS


		49LT340COUB	43LT340COUB	32LT340CBUB
MECHANICAL	Stand Type	2 Pole	2 Pole	2 Pole
	Front Color	Ceramic Black	Ceramic Black	Ceramic Black
	Weight without Stand	24.9 lbs / 11.3 kg	17.6 lbs / 8.0 kg	10.7 lbs / 4.85 kg
	Weight with Stand	25.1 lbs / 11.4 kg	17.9 lbs / 8.1 kg	10.8 lbs / 4.9 kg
	Weight in Shipping	29.5 lbs / 13.4 kg	23.1 lbs / 10.5 kg	13.4 lbs / 6.1 kg
	Size without Stand (depth to back side VESA mount)	43.7" x 25.6" x 2.8" 1,110 x 650 x 72 mm	38.5" x 22.6" x 2.8" 977 x 575 x 72 mm	29.1" x 17.4" x 2.9" 739 x 441 x 75 mm
	Size without Stand (depth to lower back side speaker)	43.7" x 25.6" x 3.2" 1,110 x 650 x 81 mm	38.5" x 22.6" x 3.2" 977 x 575 x 81 mm	29.1" x 17.4" x 3.3" 739 x 441 x 84 mm
	Size with Stand	43.7" x 27.8" x 9.3" / 1,110 x 705 x 235 mm	38.5" x 24.2" x 7.4" / 977 x 615 x 187 mm	29.1" x 18.6" x 6.6" / 739 x 472 x 168 mm
	Size in Shipping	47.0" x 30.3" x 6.2" / 1,193 x 770 x 158 mm	41.7" x 26.0" x 6.0" / 1,060 x 660 x 152 mm	32.0" x 20.1" x 5.6" / 812 x 510 x 142 mm
	VESA Compatible	300 x 300	200 x 200	200 x 200
POWER	Power Supply (Voltage, Hz)	120 V / 50-60 Hz	120 V / 50-60 Hz	120 V / 50-60 Hz
	Power Consumption (Max)	100 W	85 W	48 W
	Standby Power Consumption	Under 0.3 W	Under 0.3 W	Under 0.3 W
CERTIFICATIONS	Safety	UL	UL	UL
	EMC	FCC	FCC	FCC
OTHER	UPC	7 19192 63064 2	7 19192 63065 9	7 19192 63066 6
	Warranty	Two-Year Limited Warranty	Two-Year Limited Warranty	Two-Year Limited Warranty

DIMENSIONS


32"

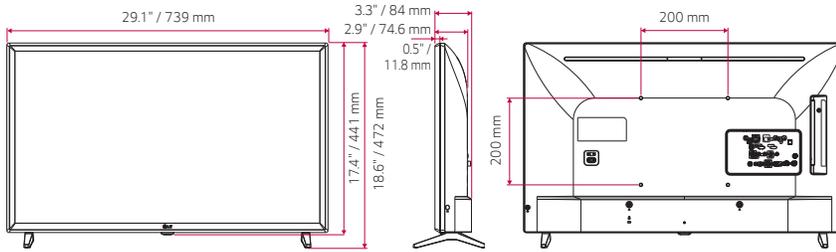

43"

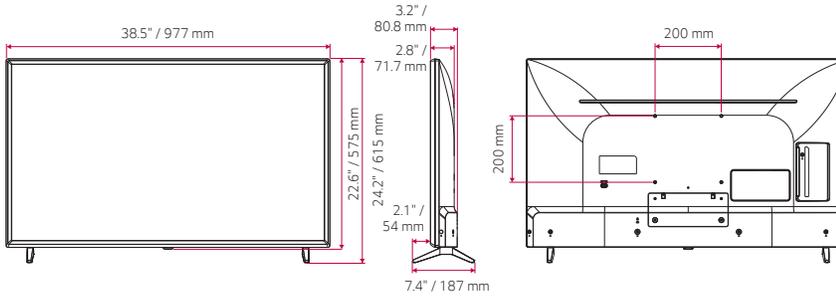


49"

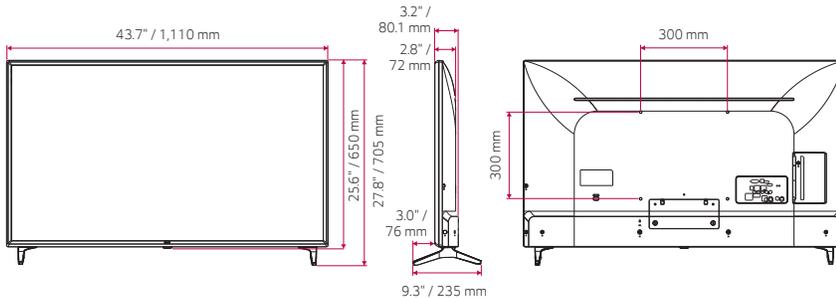


CONNECTIVITY

49" / 43"

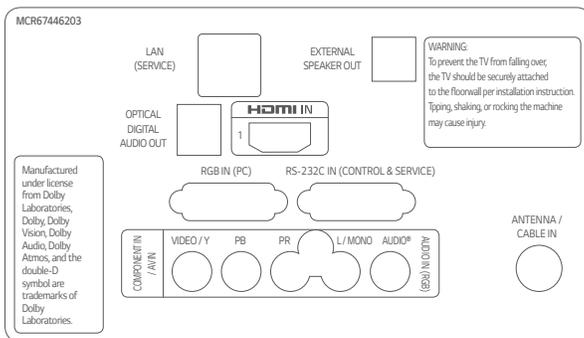

32"

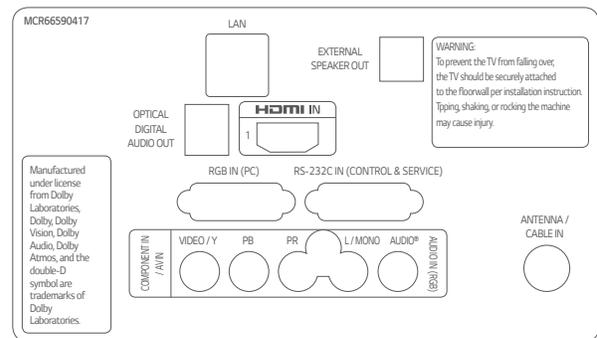

* Dimensions & jack panels (read/side) may differ from the above image. Please contact your LG sales team to verify before ordering.

- www.lg.com/us/business/commercial-display
 - www.twitter.com/LGCommDisplays
 - www.facebook.com/LGcommercialdisplays
 - www.linkedin.com/company/lg-commercial-displays-usa
 - www.youtube.com/lgcommercialdisplayusa
- 800-228-1236 | Hospitality Sales

LG may make changes to specifications and product descriptions without notice.
 © Copyright 2019 LG Electronics USA, Inc. All rights reserved. LG and the LG logo are registered trademarks of LG Corp.
 Pro:Centric and the "Pro:Centric" logo are registered trademarks of LG Electronics Inc.
 ProIdiom is a registered trademark of Zenith Electronics LLC.
 SPEC_LT340C_0419SD_PR

